Shur-Lok Galvanised Steel Access Door



Model RBA8200 Series

Materials & Features

Manufactured from Galvanised Steel with all exposed surfaces prime coated, RBA access doors are designed for plasterboard, masonry and concrete construction walls. All units have rounded safety corners to prevent injury and are provided with a concealed piano hinge, spring door lock key for ease of use and security.

Technical Detail

Material: Finish: Fixings:


2.0mm galvanised steel Prime coat suitable for painting By others

Available Models RBA8200-012 RBA8200-018 RBA8200-024

Galvanised Steel Access Door 295mm x 295mm, [Rough-in 318mm x 318mm] Galvanised Steel Access Door 445mm x 445mm, [Rough-in 470mm x 470mm] Galvanised Steel Access Door 595mm x 595mm, [Rough-in 623mm x 623mm]

Installation

Rough-In suggestions are as per above, however it is recommended to rough in each unit individually due to manufacturer's tolerances of +/- 10mm*.

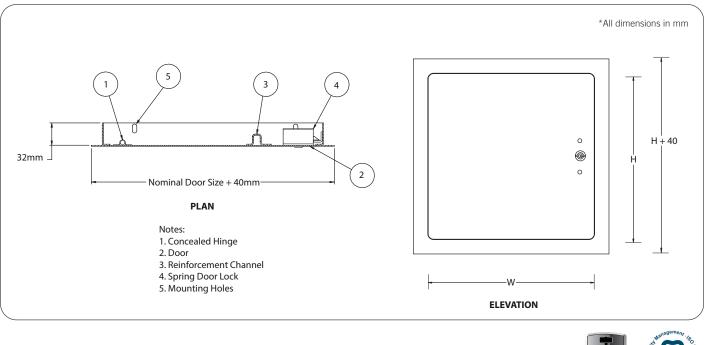

Important: Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 06/21 © 2021 by RBA Group TD/Model RBA8200 Series/0621