

MODEL

STAINLESS STEEL WC

RBA8832-100

Stainless Steel WC Front Mount Wall Hung Pan 6L/3L [P-Trap]



As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Installation Instructions Sheet. Revised 04/24 © 2024 by RBA Group II/Model RBA8832-100/0424

Components Supplied:

- P-Trap Stainless Steel Pan
- 4 x M12 threaded rods, nuts & washers

Pre-Installation

Installation must be undertaken in accordance with the PCA [Plumbing Code of Australia], AS/NZS3500.1 and AS/NZS3500.2. Where multiple WC's may be installed, correct hydraulic water supply sizing must be undertaken to ensure that each flushing device servicing each WC is able to operate correctly under probable simultaneous demand. A minimum water supply pressure of 300kPa is required for flushing device installation along with a minimum 25mm Cu or equivalent water supply line size for single flushing device installation only.


Pan is wall faced and should preferably be fixed to a masonry wall with suitable wall anchors [provided by others].

Flushing device should be RBA Nautilus Flush Valve [RBA1882-100] or equivalent flush valve or in-wall cistern.

Installation

1. Check supplied toilet against rough-ins provided on Page 4.
2. Remove access panels and place them in a safe area. Make sure to identify the access panels to the toilet they are removed from.
3. If not pre-formed, make sufficient penetrations through the wall, as determined from the drawing, to allow the 100 mm waste pipe, flush pipe as provided by the cistern or flush valve manufacturer.
 - a. If rear fixed, M12 fixing rods [by others] to pass through.
 - b. If front fixed, use suitable wall anchors [by others] in the rear of the toilet.
4. Determine mounting location by mocking up.
5. If S-Clip is provided fix to floor at the front of the cut-out on the bottom of toilet determined by the mock-up.
6. Fit a 100 mm pan collar to the outlet with sufficient 100 mm pipe to extend through the wall. [Alternately the waste and flush pipes may be pre-plumbed and the pan pushed onto the pipework].
7. Similarly fit a 55 mm Kee seal [Supplied by others] to the pan inlet with sufficient pipe, as provided by the cistern or flush valve manufacturer, to extend through the wall.
8. Push the pan into position and secure the pan to the wall [fixings by others].
9. Make the necessary connections to the waste and connect the flushing device according to the manufacturer's instructions.
10. Check for leaks and correct flush volumes.

Dimensions & Rough In

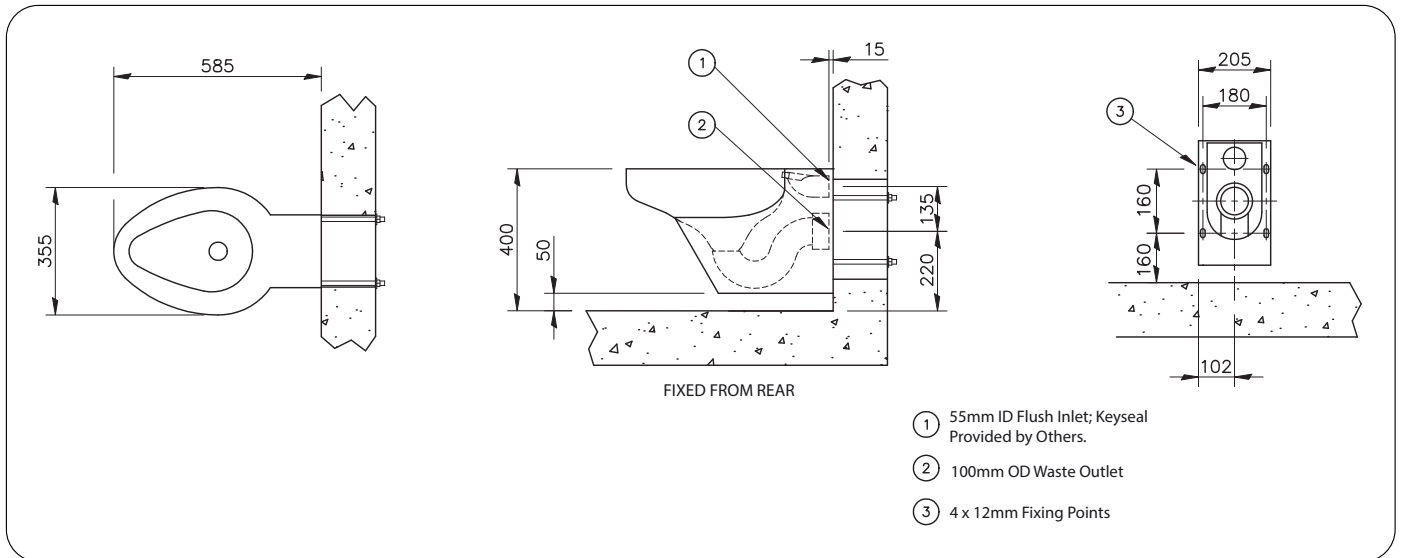

Note: This product should be installed, by suitably qualified persons, in a fit for purpose application, to suitable materials, using suitable fixings and comply with any relevant codes. It should be inspected periodically for signs of wear and tear that may affect performance or safety.

Dimensions are subject to manufacturer's tolerance of +/-10mm. Rough-in should be completed with each fixture.

Important: Installation Instructions are subject to change without notice. Please visit **our websites** for latest revision.