

Shower T - Rail Set | Right Hand



Models RBA4110-926

Materials & Features

Set consists of a wall mounted Stainless Steel rail. Complete with slider, handset and 2.0M hose (1.5M available upon request). Water supply connection includes backflow prevention. <u>Grab rail is accessible compliant when installed in accordance with AS1428.1-2009.</u>

Technical Detail

Rail: #304 Stainless Steel, Satin, 32mm Dia

Hose: 2.0M

Inlet Connection: DN 15mm (1/2") BSP

Includes backflow prevention

Water Pressure: 150-500 kpa

Water Temperature: 50°C
Flow Rate: 8.0 LPM
WELS: 3 star

Available Model

RBA4110-926 Right Hand Accessible Compliant Shower 'T' Grab Rail with slider, handset and 2.0M hose

Related Products

RBA4110-927 Left Hand Accessible Compliant Shower 'T' Grab Rail with slider, handset and 2.0M hose


RBA1110-750 Shower Mixer, Rectangle Plate

RBA4110-999-005 Sliding Soap Dish

Installation

Warning: Grab rails are no stronger than the anchors or walls to which they are attached and must be firmly secured in order to support the loads for which they are intended.

Note: For Australia, Installation shall be in accordance with the PCA [Plumbing Code of Australia] and any relevant local authority requirements. **Important:** Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

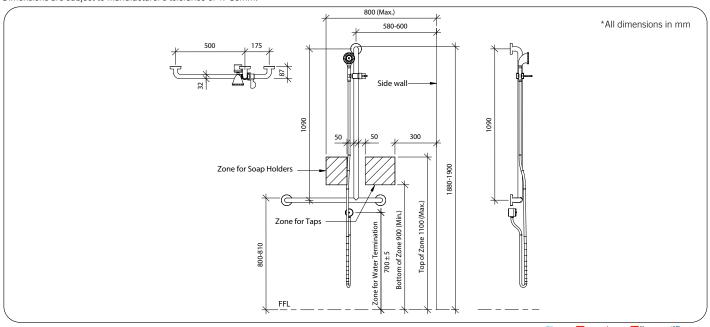









As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 11/21 © 2021 by RBA Group TD/Model RBA4110-926/1121