


Model RBA4000-777-042

Materials & Features

Modular Stainless steel straight grab rail meets the requirements of AS1428.1 when installed correctly. The snap flange cover conceals the fixings. Grab rail length is maximum 2150mm but can be shortened at installation to suit custom lengths.

Technical Detail

Rail: 32mm [Dia], 304 Satin Stainless Steel
 Fixings: Included Screws and Plugs

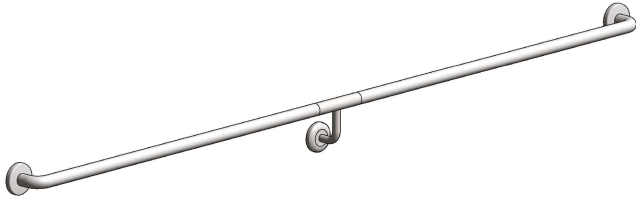

Available Model
RBA4000-777-042

Modular Straight Grab Rail

Installation

Warning: Grab rails are no stronger than the anchors or walls to which they are attached and must be firmly secured in order to support the loads for which they are intended. Refer to local codes and Installation Instructions for location of fixing points, method of attachment, etc.

Important: Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

