

Models RBA2732-032-UG, RBA2732-033-UG & RBA2732-132-UG



*RBA2732-032-UG shown

Materials & Features

Basin manufactured from stainless steel with all exposed surfaces in satin finish. Anti-microbial flexible bubbler with self-closing push button and non-squirt features. Stainless steel bubbler and vandal resistant options available on request. Valve includes flow adjuster and strainer. Integral perforated drain for hygiene & ease of cleaning. Smooth radiused design eliminates sharp corners. Fully concealed pipework and fixings.

Technical Detail

Inlet Connection:	G $\frac{1}{2}$ B
Outlet Connection:	40mm BSP waste
Water Pressure:	200 – 500 kPa
Basin & Housing:	1.6mm, type 304 Stainless Steel
Force to activate:	≤ 22N
Refrigerant:	R-134a
Power Requirement:	220VAC, 50HZ, single phase
Capacity:	30L/hr drinking water at 10°C (incoming 27°C, ambient 32°C)

Available Models

RBA2732-032-UG

Wall mounted 'Compact' satin finish water cooler, w/ flexible bubbler, 30L/hr

RBA2732-033-UG

Wall mounted 'Compact' satin finish water cooler, w/ stainless bubbler, 30L/hr

RBA2732-132-UG

Wall mounted 'Compact' satin finish water cooler, w/ flexible bubbler and glass filler, 30L/hr

RBA2731-032-UG

Wall mounted 'Compact' grey finish water cooler, w/ flexible bubbler, 30L/hr

Related Models

RBA2731-500

H₂O-to-Go!® Pushbutton, water cooler mounted bottle filler

RBA2731-502


H₂O-to-Go!® Sensor Op, Bottle Counter Display, water cooler mounted bottle filler

RBA2731-503

H₂O-to-Go!® Sensor Op, water cooler mounted bottle filler

For best results, unit should be inspected and cleaned regularly as per the instructions in the RBA Product Warranty, Cleaning Care Guide, available on our websites.

Important: (Sub body) Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

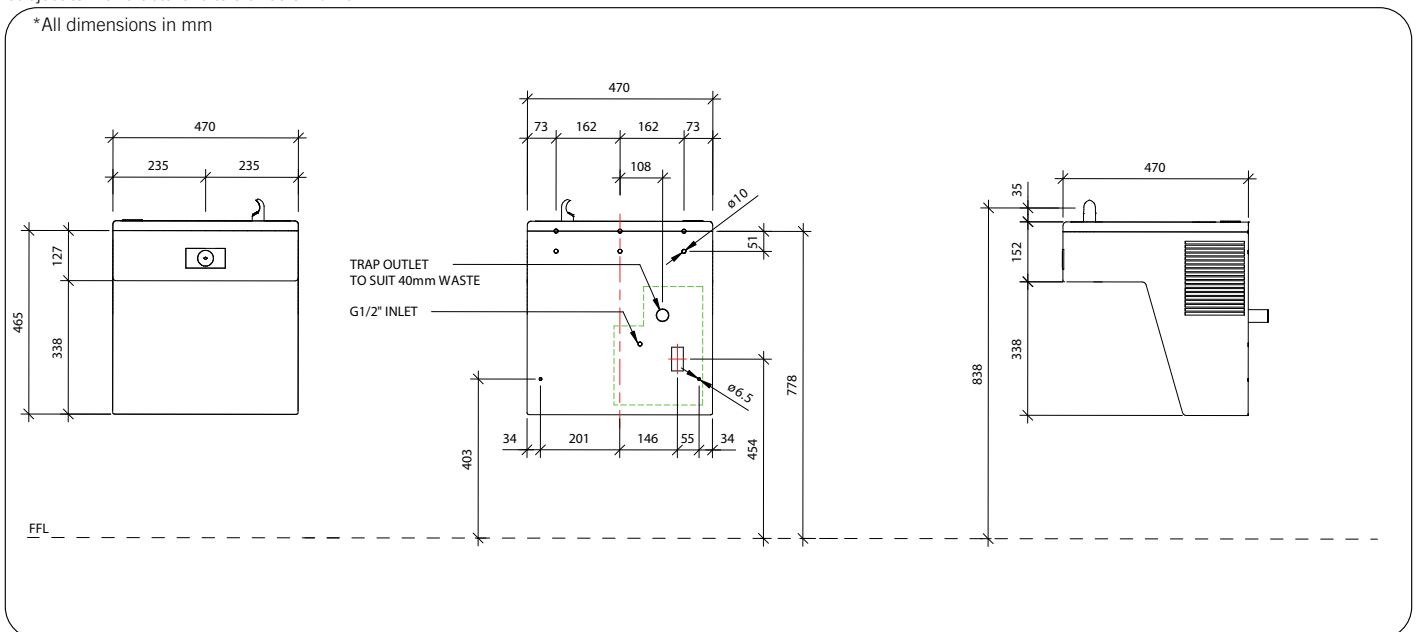

As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 08/22 © 2022 by RBA Group TD/Model RBA2732-032-UG/0822