

Shower T-Rail | Matte Black

*RBA4115-921 Shown

Models RBA4115-921 & RBA4115-923

Materials & Features

Stainless steel shower T-Rail meets the requirements of AS1428.1 when installed correctly. The snap flange covers conceal the fixings.

Technical Detail

Rail: 32mm [Dia], 304 Satin Stainless Steel

Finish: Matte Black SWL: 2000N Fixings: By others

Available Model

RBA4115-921 Shower T-Rail, Right Hand, Matte Black Shower T-Rail, Left Hand, Matte Black


Related Products

RBA4110-700-002 4 Star Shower Handest, Matte Black Round Shower Mixer, Matte Black

Installation

Warning: Grab rails are no stronger than the anchors or walls to which they are attached and must be firmly secured in order to support the loads for which they are intended.

Important: Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

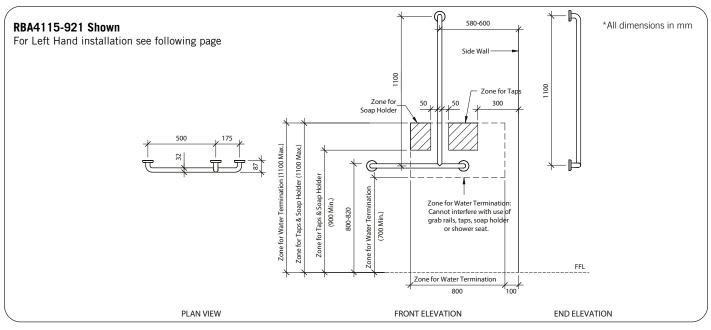






As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 12/22 © 2022 by RBA Group TD/Model RBA4115-921/RBA4115-923/1222



Shower T-Rail | Matte Black

Models RBA4115-921 & RBA4115-923



*RBA4115-923 Shown

Available Model

RBA4115-921 Shower T-Rail, Right Hand, Matte Black Shower T-Rail, Left Hand, Matte Black


Related Products RBA4110-700-002

RBA4110-700-002 4 Star Shower Handest, Matte Black Round Shower Mixer, Matte Black

Installation

Warning: Grab rails are no stronger than the anchors or walls to which they are attached and must be firmly secured in order to support the loads for which they are intended.

Important: Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

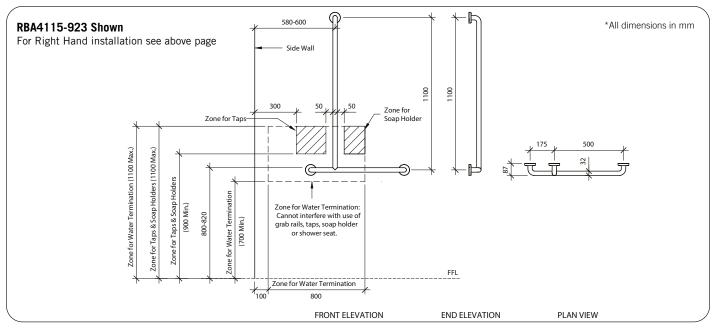





As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 12/22 © 2022 by RBA Group TD/Model RBA4115-921/RBA4115-923/1222