

## Model RBA4604-069



\*Potential Installation for RH Shown

### Materials & Features

Set consists of a wall mounted Stainless Steel shower grab rail, complete with slider, handset and 1.5M hose. Water supply connection includes backflow prevention. Grab rail is accessible compliant when installed in accordance with AS1428.1 and local building codes. Rails are ambidextrous and vertical rail can be positioned left, right or centre.

### Technical Detail

|                    |   |
|--------------------|---|
| Rail:              | 32mm [Dia], 304 Stainless Steel   |
| Finish:            | Chrome Plated   |
| Hose:              | 1.5m  |
| Handset:           | 6 LPM, 5 Star WELS  |
| Inlet Connection:  | DN 15mm (1/2") BSP<br>Includes backflow prevention                      |
| Water Pressure:    | 150-500 kpa   |
| Water Temperature: | 50°C Maximum  |
| WELS Reg. Number   | S14913  |
| SWL:               | 200Kg [independently tested- contact RBA Group for test documentation]. |

### Available Models

**RBA4604-069**

Raffaello Shower T-Rail Set Incl, 5 Star WELS Handset & Slider, Chrome

### Related Products

**RBA4605-069**

Raffaello Shower T-Rail Set Incl, 5 Star WELS Handset, Slider & Mixer, Chrome


### Installation

Warning: Grab rails are no stronger than the anchors or walls to which they are attached and must be firmly secured in order to support the loads for which they are intended. Refer to local codes and Installation Instructions for location of fixing points, method of attachment, etc.

**Important:** Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

#### Potential Installation - Right Hand

For Left Hand installation see following page

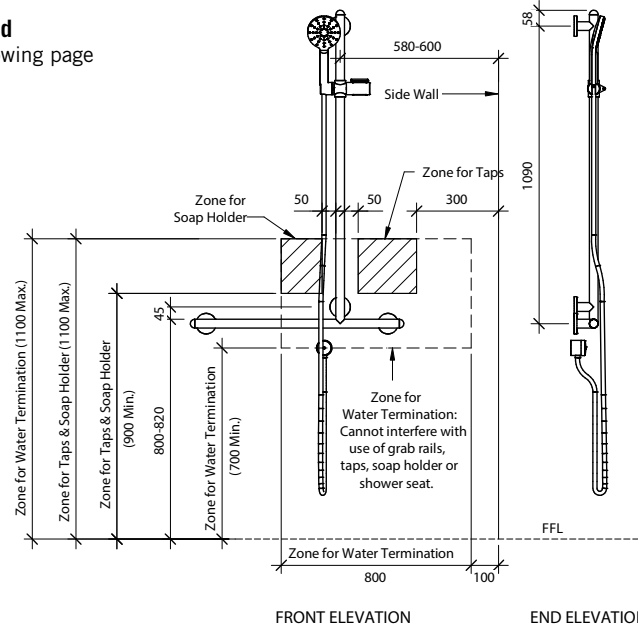

\*All dimensions in mm



As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 12/22 © 2022 by RBA Group TD/Model RBA4604-069/1222

## Model RBA4604-069




\*Potential Installation for LH Shown

**Important:** Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

### Potential Installation - Left Hand

For Right Hand installation see previous page

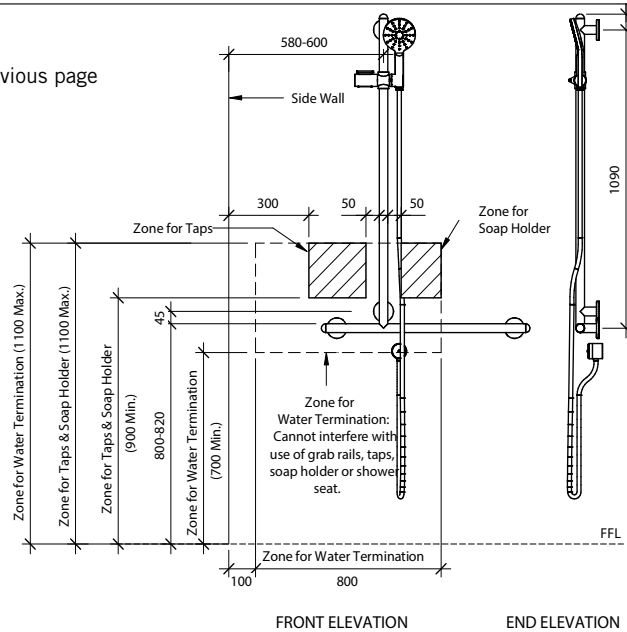

\*All dimensions in mm



As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 12/22 © 2022 by RBA Group TD/Model RBA4604-069/1222