

Steri+Shield™ Shower T-Rail Kit & Mixer I Satin



Model RBA4901-722

Materials & Features

Modular stainless steel shower T-rail to meet the requirements of AS1428.1 when installed correctly. Rails are ambidextrous, allowing the vertical rail to be positioned left, right or centre to suit site requirements. Steri+Shield is a protective sanitary seal system that prevents the buildup of bacteria and grime. Independent laboratory testing has shown Steri+Shield to be up to 99% effective at reducing the microbial growth of common washroom microbes E.Coli and S.Aureus within 24 hours.

Technical Detail

Rail: 32mm [Dia], 304 Satin Stainless Steel

Hose: 1.5n

Inlet Connection: DN 15mm [1/2"] BSP Includes backflow prevention

Water Pressure: 150-500 kPa
Water Temperature: 50°C Maximum
Flow Rate: 6.0 LPM

WELS: 5 Star WELS Reg. Number: 5 Star S14913

Available Model RBA4901-722

Steri+Shield™ Shower T-Rail Kit & Mixer I Satin

Related Products


B819687Bobrick Accessible Compliant Folding Shower SeatRBA1110-750oken Shower Mixer I Chrome I Rectangular PlateRBA4901-721Steri+Shield™ Shower T-Rail Kit I Satin

Installation

Warning: Grab rails are no stronger than the anchors or walls to which they are attached and must be firmly secured in order to support the loads for which they are intended. Refer to local codes and Installation Instructions for location of fixing points, method of attachment, etc.

For best results, unit should be inspected and cleaned regularly as per the instructions in the RBA Product Warranty, Cleaning Care Guide, available on our websites.

Important: Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

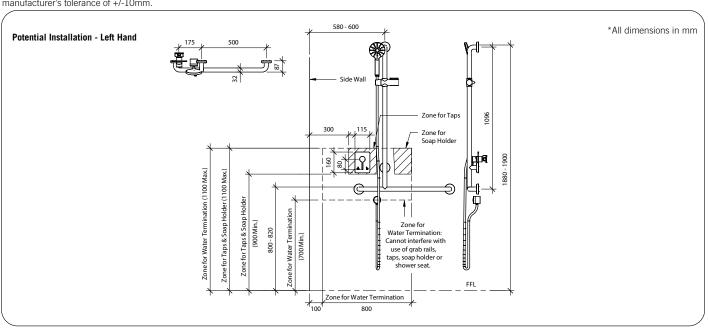











As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 10/23 © 2023 by RBA Group TD/Model RBA4901-722/1023