

'Rio' Self Closing Tap





Materials & Features

Self-closing tap is designed for public washrooms, offices, schools, shopping centres, stadiums & airports. Single connection, tap will deliver cold or pre mixed water, single temperature only. Tap is activated by pushing the button, flow will cease when preset time is achieved. Tap cartridge is self-cleaning.

Technical Detail

Tap Body: DZR Brass, Chrome plated

Inlet Connection: 15mm BSP (1/2")

Flow Time: 4-10 seconds (non-adjustable)

Operating Pressure: 200 – 500 kPa

Supply: Single temp (Max. 55°C)

Flow Rate: 4.5LPM
Nominal Flow Rate: 4.2LPM
WELS Reg.number: T08713
WELS Rating: 6 Star
Locknut: Brass

Force to activate: 20N @ 300 kPa


Available Models RBA1044-600

6 Star [4.5Lpm] Self Closing Push Tap

Related Products RBA1083-999-010

Heavy Duty Brass Locknut (add-on for installations in vandal prone areas)

Note: For Australia, Installation shall be in accordance with the PCA [Plumbing Code of Australia] and any relevant local authority requirements. **Important:** Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of ±/-10mm

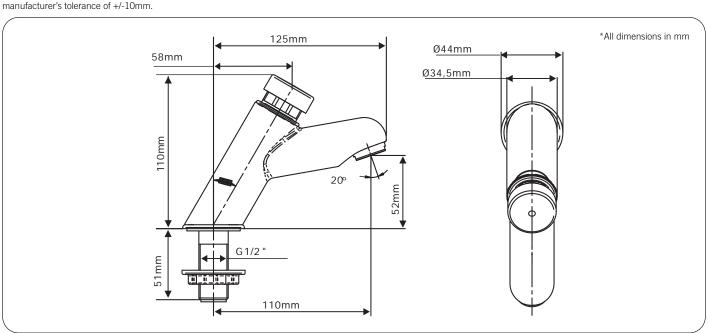













As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 03/22 © 2022 by RBA Group TD/Model RBA1044-600/0322