

'Rio-Plus' Self Closing Wall Tap



Model RBA1053-688

Materials & Features

Self-closing tap is designed for public washrooms, offices, schools, shopping centres, stadiums & airports. Single connection, tap will deliver cold or pre mixed water, single temperature only. Tap is activated by pushing the button, flow will cease when preset time is achieved. Tap cartridge is self-cleaning. Tap includes integrated isolation valve for easier maintenance

Technical Detail

Tap Body:DZR Brass, Chrome platedInlet Connection:15mm BSP (1/2"), MaleFlow Time:4-10 seconds (non-adjustable)

Operating Pressure: 200 – 500 kPa

Supply: Single temp (Max. 55°C)

Flow Rate: 5.5LPM
Nominal Flow Rate: 5.1LPM
WELS Reg.number: T08694
WELS Rating: 6 Star

Force to Activate: 20N @ 300 kPa


Available Models RBA1053-688

6 Star [5.5Lpm] 'Rio-Plus' Self Closing Wall Tap with Integrated Isolation Valve

Related Products

RBA1053-600 'Rio' Self Closing Wall Tap RBA1053-999-001 Vandal Resistance Kit RBA1053-999-002 65mm Extension Kit

Note: For Australia, Installation shall be in accordance with the PCA [Plumbing Code of Australia] and any relevant local authority requirements. **Important:** Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

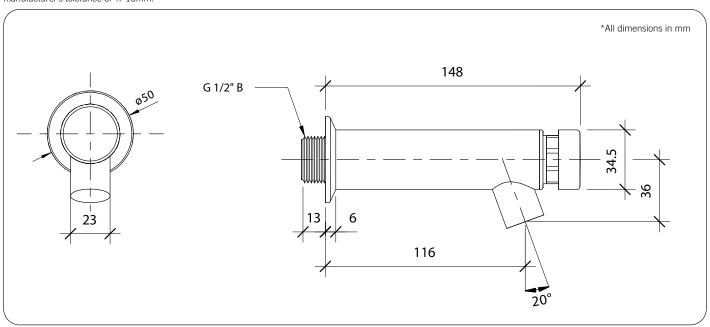













As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 03/22 © 2022 by RBA Group TD/Model RBA1053-688/0322