

Model RBA8519-114



Materials & Features

Optimum ligature and vandal resistance without compromising on efficiency and performance. The Coolum Commercial Showerhead is constructed from heavy-duty low lead DZR brass and is suitable for all commercial and institutional projects, including in correctional, healthcare and educational facilities. The innovative design provides staff and installers unparalleled flexibility, allowing front and rear fixing and for the unit to be serviced without removing the body from the wall.

Technical Detail

Body:	Chrome plated, low lead DZR brass
Inlet Connection:	1/2" BSP female
Temperature:	10 - 70°C
Flow Rate:	5.9L per minute
WELS Rating:	5 Star
Operating Pressure:	150 – 500 kPa in accordance with AS/NZS3500 and the PCA

Available Models

RBA8519-114 5 Star [5.9L/m] Coolum Commercial Showerhead

Related Products


- RBA1055-530** 30 Second Self-Closing Tap Valve
- RBA8519-201** Coolum Commercial Showerhead and Handles Kit
- RBA8519-115** Coolum Commercial Shower Handle, with 3 coloured temperature indicators

Installation

To be installed in accordance with the Plumbing Code of Australia [PCA] and AS/NZS3500. Recess bodies are to be Watermark certified to AS3688. Heated water installations for sanitary fixtures shall comply with the temperature requirements of the PCA and AS/NZS3500.

For best results, unit should be inspected and cleaned regularly as per the instructions in the RBA Product Warranty, Cleaning Care Guide, available on our websites.


Important: Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

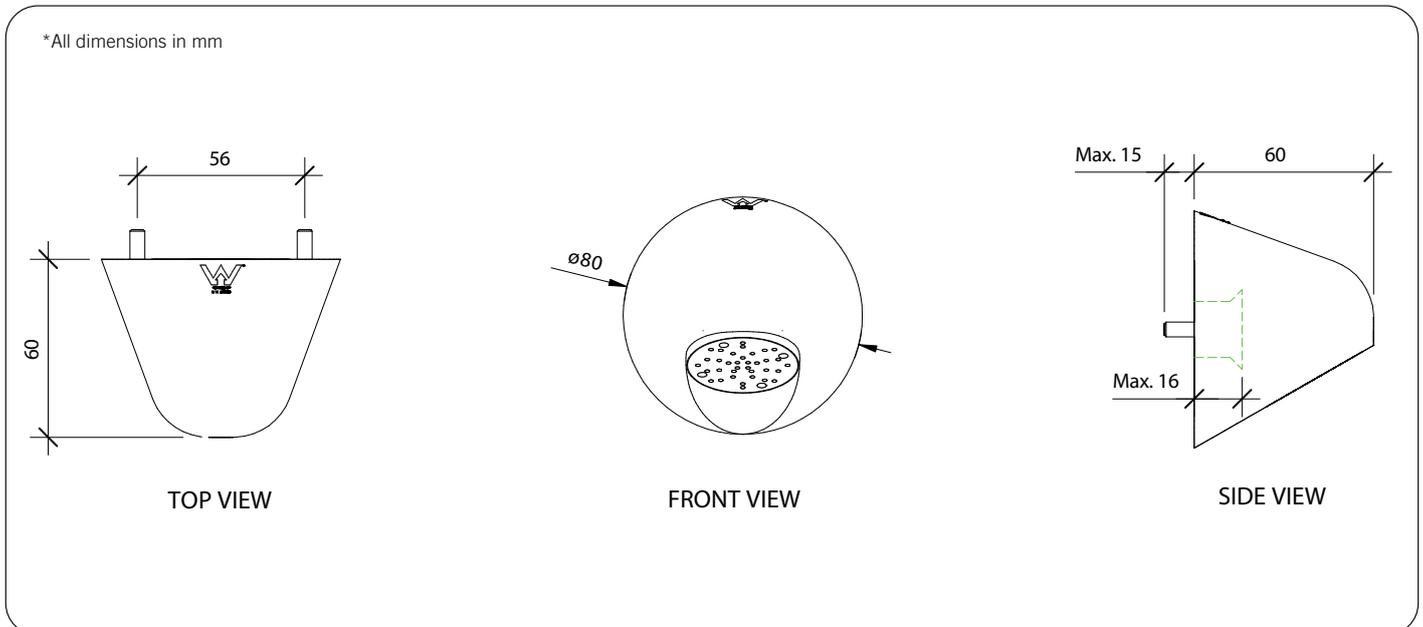


Model RBA8519-114

*All dimensions in mm


Static Pressure: 500kPa
Flow Rate: 5.9L/m

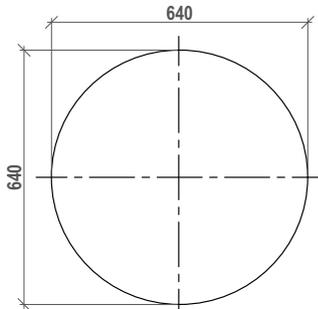

FFL Foot Print @2050

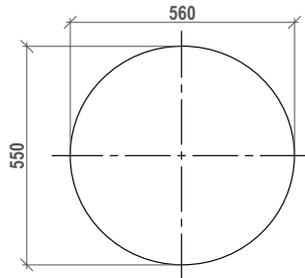

Alternate FFL Foot Print @1800

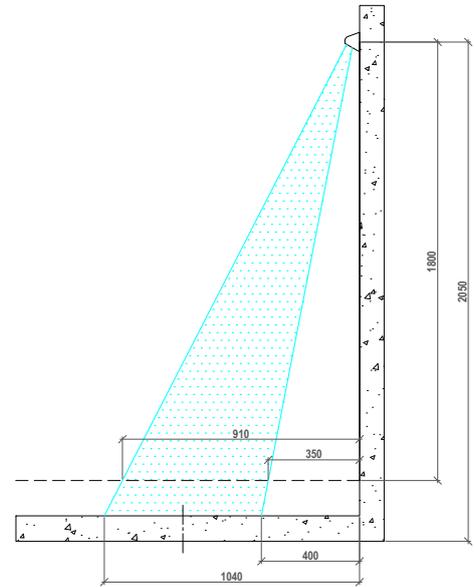

Note: Isolated spray will occur outside of the footprint. Pressure, temperature & other site conditions may slightly vary outcomes.

Please note: While RBA takes all reasonable measures to ensure our ligature resistant products consistently perform as advertised, we do not perform load testing on every item. RBA strongly recommends all customers perform their own load testing on each item prior to installation and at regular intervals throughout the life of the product.

RBA does not offer or warrant any of our products as 'anti-ligature' as no product can be truly ligature-free. RBA will not be liable for any claims, losses or damage arising from ligature attachment to our products. It is the responsibility of the purchaser and installer to ensure supplied products are suitable for the environments they are to be installed into.

As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 02/24 © 2024 by RBA Group TD/Models RBA8519-114/0224