


Model RBA2770-020-UG

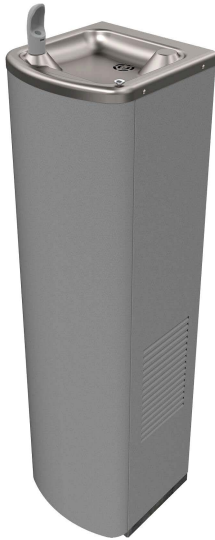

Materials & Features

Freestanding wall faced water cooler universal grey powder coated finish. Anti-microbial flexible bubbler with self-closing push button and non-squirt features. Stainless steel bubbler options available on request. Valve includes flow adjuster and strainer. Integral perforated drain for hygiene & ease of cleaning. Smooth radiused design eliminates sharp corners. Fully concealed pipework and fixings. Adjustable thermostat with an off position regulates the refrigeration system.

Technical Detail

Inlet Connection:	1/2" BSP
Outlet Connection:	40mm BSP waste
Water Pressure:	200 – 500 kPa
Basin & Housing:	1.6mm, type 304 Stainless Steel
Refrigerant:	R-134a
Power Requirement:	220VAC, 50HZ, single phase
Capacity:	19L/hr drinking water at 10°C (incoming 27°C, ambient 32°C)

Available Models

RBA2770-020-UG

Freestanding Wall Faced Water Cooler | Grey | 19L/hr

RBA2770-120-UG

Freestanding Wall Faced Water Cooler with Glass Filler | Grey | 19L/hr

Installation

Ensure wall construction is suitable to support the unit and mount to wall. Fixings, isolation valve, trap & GPO by others. Allow 100mm minimum clearance either side for ventilation.

Important: Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

