

# Hi-Lo™ Outdoor Drinking Fountain

## Models RBA8910-201 RBA8910-202



#### Materials & Features

Manufactured from stainless steel including a stainless shielded bubbler with self-closing push button and non-squirt features. Valve includes flow adjuster and strainer. Integral perforated drain for hygiene & ease of cleaning. Smooth radiused design eliminates sharp corners. Fully concealed pipework and fixings. Unit is nonrefrigerated.

### **Technical Detail**

Inlet Connection: 1/2" BSP **Outlet Connection:** 40mm BSP waste 200 - 500 kPa Water Pressure:

Force to Activate: ≤ 22N

1.2mm, type 304 Stainless Steel Basin: 2.5mm, type 304 Stainless Steel Housing:

Satin Finish (-001) Finish: Enviro-Glaze® green (-002)

**Available Models** 

RBA8910-201 Hi-Lo™ Outdoor Drinking Fountain, Satin

RBA8910-202 Hi-Lo™ Outdoor Drinking Fountain, Enviro-Glaze® Green

### **Related Products**


RBA8910-401 Outdoor Pet Fountain (can be used in conjunction with the RBA8910-201 as a complete solution) RBA8910-402 Outdoor Pet Fountain (can be used in conjunction with the RBA8910-202 as a complete solution)

RBA8910-002 Outdoor Drinking Fountain

RBA8909-429 Outdoor Drinking Fountain, Accessible

### \* RBA recommends the use of a 350kPa pressure limiting valve with all RBA drinking fountains and bottle fillers.

Important: Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

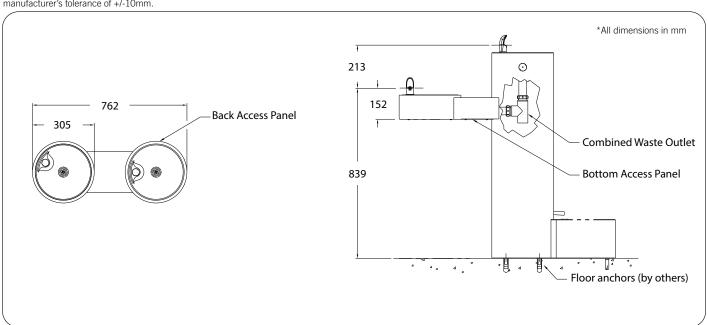







As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 04/24 © 2024 by RBA Group TD/Model RBA8910-201-202/0424