

Straight Grab Rail | Satin



Model RBA4000-Straight-Series

Materials & Features

Stainless steel straight grab rails available in a range of lengths to meet the requirements of AS1428.1 when installed correctly. Snap flange covers conceal fixings after installation.

Technical Detail

Rail. 32mm [Dia], 304 Satin Stainless Steel

Fixings: Supplied




Available Models

RBA4000-030 Straight Grab Rail 300mm RBA4000-040 Straight Grab Rail 400mm RBA4000-045 Straight Grab Rail 450mm RBA4000-060 Straight Grab Rail 600mm RBA4000-070 Straight Grab Rail 700mm RBA4000-080 Straight Grab Rail 800mm RBA4000-090 Straight Grab Rail 900mm RBA4000-100 Straight Grab Rail 1000mm RBA4000-120 Straight Grab Rail 1200mm

Installation

Warning: Grab rails are no stronger than the anchors or walls to which they are attached and must be firmly secured in order to support the loads for which they are intended. Refer to local codes and Installation Instructions for location of fixing points, method of attachment, etc.

Important: Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

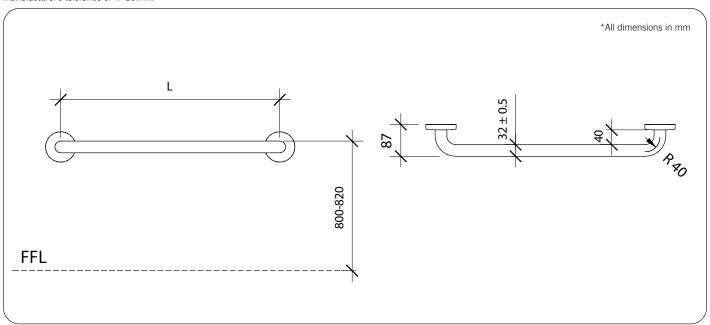





As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 01/24 © 2024 by RBA Group TD/Model RBA4000-Straight-Series/0124

^{*}Additional sizes available upon request