

Model RBA4090-450



Materials & Features

Stainless steel 90° angled grab rail to meet requirements of the ambulant section of AS1428.1 when installed correctly. Snap flange covers conceal fixings after installation. Unit is ambidextrous, allowing installation on left or right hand side.

Technical Detail

Rail: 32mm [Dia], 304 Satin Stainless Steel
 Fixings: Supplied

Available Models

RBA4090-450 Ambulant Grab Rail 90° 450 x 450mm


Related Products

- RBA4090-999-001** Single Dress Plate For Panel Mounting
- RBA4330-022** Tactile Sign, Male Ambulant, 316 Stainless Steel
- RBA4330-023** Tactile Sign, Female Ambulant, 316 Stainless Steel

Installation

Warning: Grab Rails are no stronger than the anchors or walls to which they are attached and, therefore, must be firmly secured in order to support the loads for which they are intended. Refer to local codes and Installation Instructions for location of fixing points, method of attachment, etc.

Important: Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

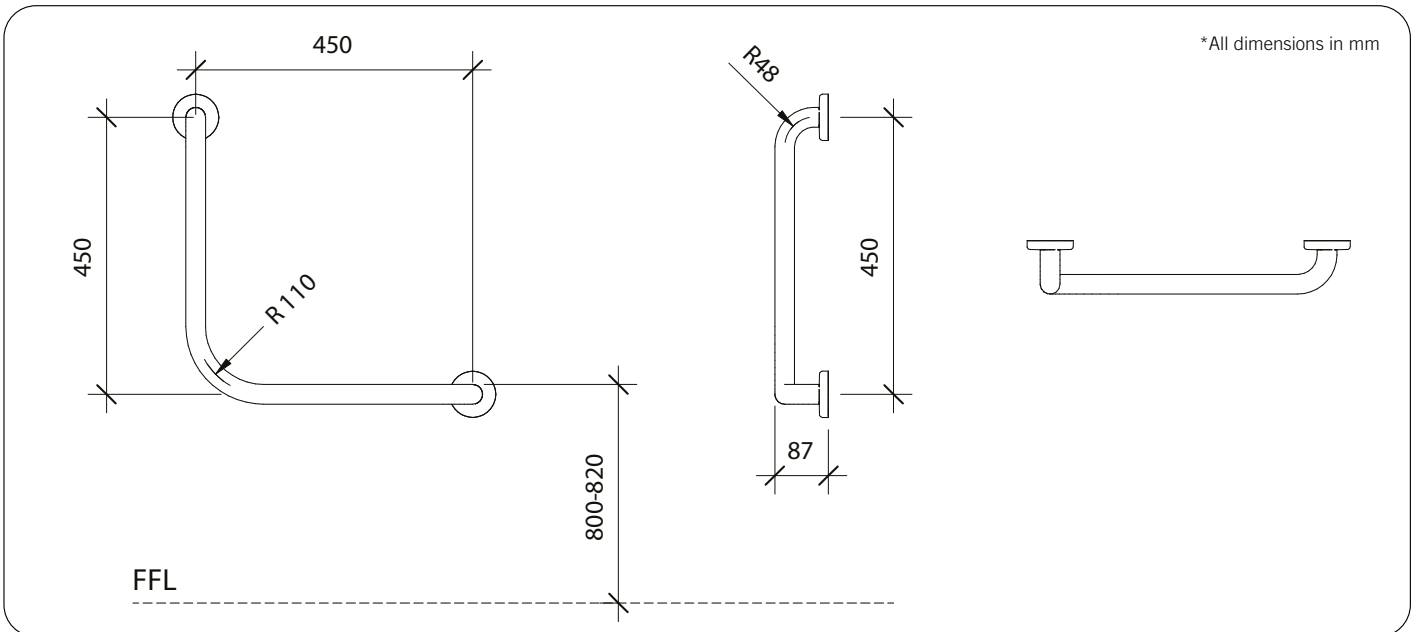

As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 01/24 © 2024 by RBA Group TD/Model RBA4090-450/0124