

## Model RBA8900-102



### Materials & Features

Manufactured from stainless steel with all exposed surfaces in satin finish. Chrome plated, shielded bubbler with self-closing push button and non-squirt features. Valve includes flow adjuster and strainer. Integral splashback and perforated drain for hygiene & ease of cleaning. Smooth radiused design eliminates sharp corners. Exposed pipework where security/aesthetics is not critical. Unit is non-refrigerated.

### Technical Detail

|                    |                                 |
|--------------------|---------------------------------|
| Inlet Connection:  | G $\frac{1}{2}$ B               |
| Outlet Connection: | 40mm BSP waste                  |
| Water Pressure:    | 200–500 kPa                     |
| Water Temperature: | 4–30°C                          |
| Basin and Housing: | 1.6mm, type 304 Stainless Steel |


### Installation

Ensure wall construction is suitable to support the unit and mount to wall with S-clip provided. Trap and wall anchors by others. Typical mounting heights are 915mm above FFL (Adult) and 760mm above FFL (Junior).

### Related Products

- RBA8900-429** Wall Mounted Drinking Fountain, Accessible to AS1428.2
- RBA8900-018** Wall Mounted Drinking Fountain
- RBA2750-031** Remote Chiller

**Important:** Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

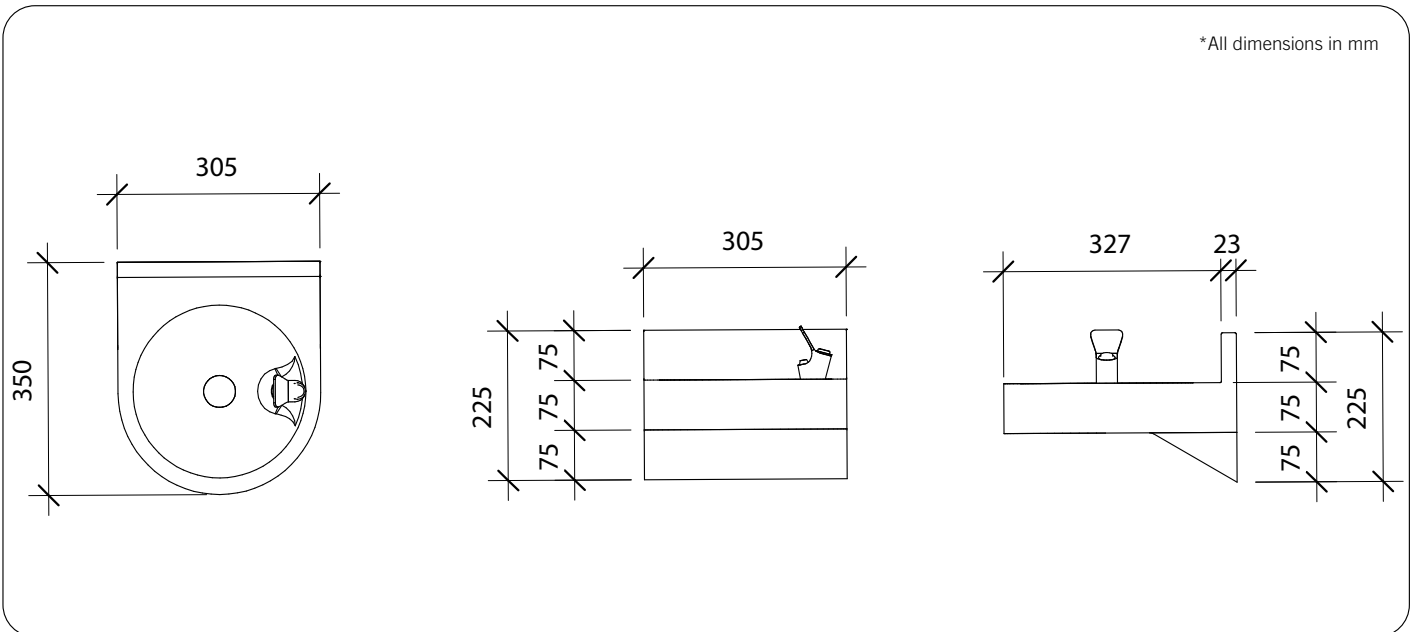

As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 10/24 © 2024 by RBA Group TD/Model RBA8900-102/1024