

Model RBA2733-035-UG



Materials & Features

Basin manufactured from stainless steel with all exposed surfaces in satin finish. Stainless steel bubbler with self-closing, vandal-resistant push button and non-squirt features. Flexible bubbler available upon request. Valve includes flow adjuster and strainer. Integral perforated drain for hygiene & ease of cleaning. Smooth radiused design eliminates sharp corners. Fully concealed pipework and fixings. Suitable for outdoor installation, see installation instructions for more details.

Technical Detail

Inlet Connection:	1/2" BSP
Outlet Connection:	40mm BSP waste
Water Pressure:	200 – 500 kPa
Basin & Housing:	1.6mm, 304 stainless steel
Force to Activate:	≤ 22N
Refrigerant:	R-134a
Power Requirement:	220VAC, 50Hz, single phase
Capacity:	30L/hr drinking water at 10°C [incoming 27°C, ambient 32°C]

Available Models

RBA2733-035-UG

Wall-Mounted Water Cooler with Vandal Resistant Button | Stainless Bubbler | Satin Finish

Related Products

RBA2732-032-UG

'Compact' Water Cooler with Flexi Bubbler

RBA2736-502

SpringH₂O Bottle Filler | Cooler Mounted | Sensor Op. and BCD


RBA8910-201

Hi-Lo™ Outdoor Drinking Fountain | Satin

For best results, unit should be inspected and cleaned regularly as per the instructions in the RBA Product Warranty, Cleaning Care Guide, available on our websites.

Important: Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

*All dimensions in mm

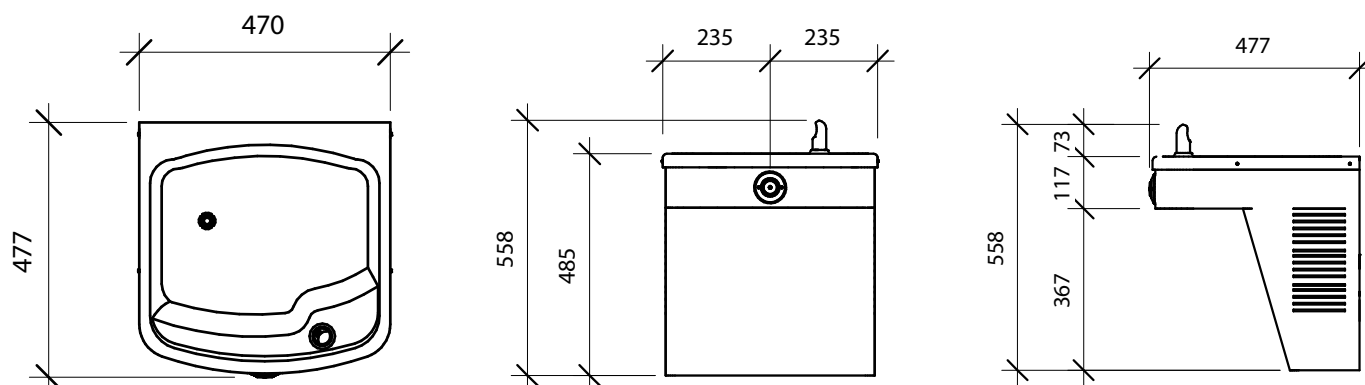

As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 05/25 © 2025 by RBA Group TD/Models RBA2733-035-UG/0625