


Specify Finish Required

- ☐ Stainless Steel, Satin Finish
- ☐ Matte Black Finish, please use model no. B-9254.MBLK

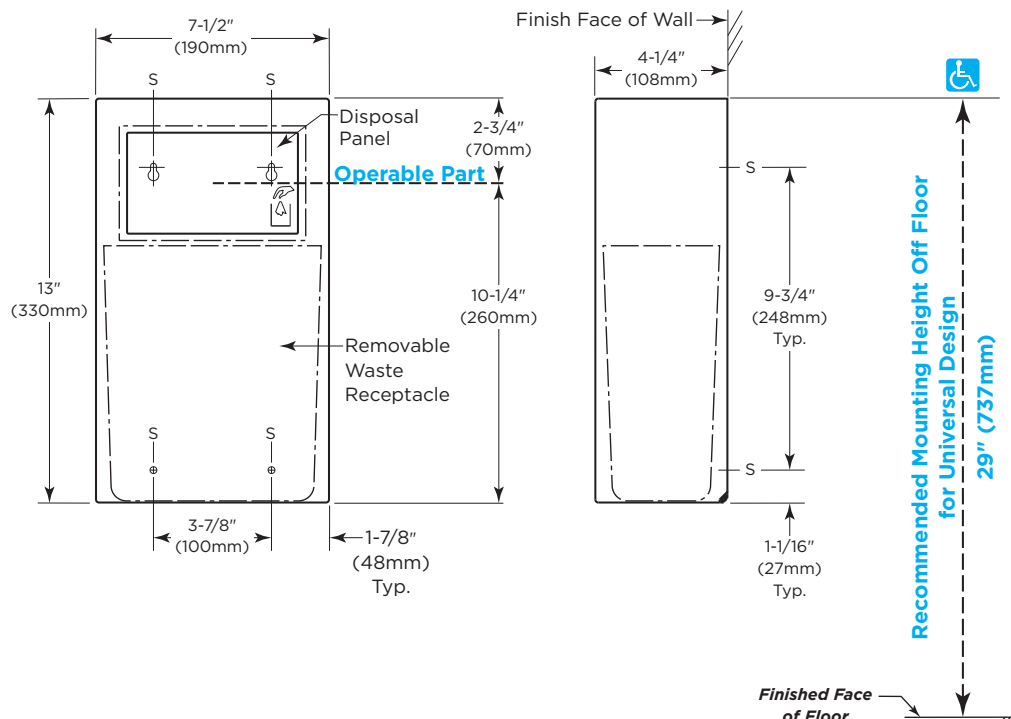

MATERIALS:

Cabinet — 18-8, type-304, 18-gauge (1.2mm) stainless steel with satin finish or matte black, as specified. All seam-welded construction with well defined edges and corners. Cabinet is connected to backplate via a hinge at the unit's rear bottom. Cabinet-swing-limiter allows cabinet to open for ease of servicing the waste receptacle and prevents cabinet from harming the wall or toilet when opening. Equipped with a tumbler lock keyed like other Bobrick washroom accessories. Lock is on top of unit and flush with the surface – no protrusion.

Back Plate — 18-8, type-304, 20-gauge (0.91mm) stainless steel.

Disposal Panel — 18-8, type-304, 18-gauge (1.2mm) stainless steel with satin finish or matte black, as specified. Bottom edge hemmed for safety. Secured to cabinet with spring-loaded, full-length stainless steel piano-hinge. Equipped with international graphic symbol identifying sanitary disposal.

Waste Receptacle — Leak-proof, rigid molded polyethylene. Removable for servicing. Capacity: 0.8-gal. (3.0-L).

continued . . .

OPERATION:

Unit is equipped with a self-closing panel covering the disposal opening. Disposal is emptied by opening the cabinet with furnished key and removing waste receptacle.

5-Year Limited Warranty — In addition to Bobrick's one-year guarantee, Bobrick extends a limited 5-year warranty from the date of purchase on all parts for model B-9254. This warranty is limited to the repair or exchange of defective parts at the option of Bobrick and is only extended to the original owner of the installed unit against defects in factory workmanship or material under normal use and service.

INSTALLATION:

For partitions with particle-board or other solid core, secure with four #8 x 1-1/4" (4.2 x 32mm) sheet-metal screws (not furnished), or provide through-bolts, nuts, and washers.

For hollow-core metal partitions, provide solid backing into which sheet-metal screws can be secured. If two units are installed back-to-back, then provide threaded sleeves and machine screws for the full thickness of partition.

For plaster or dry wall construction, provide concealed backing to comply with local building codes, then secure unit with #8 x 1-1/4" (4.2 x 32mm) sheet-metal screws.

For other wall surfaces, provide fiber plugs or expansion shields for use with #8 x 1-1/4" (4.2 x 32mm) sheet-metal screws, or provide 3/16" (5mm) toggle bolts or expansion bolts.

Replacement Parts:

Waste Receptacle Replacement 9254-20

SPECIFICATION:

Surface-mounted sanitary disposal shall be type-304 stainless steel with seam-welded construction; exposed surfaces shall have satin finish or matte black, as specified. Backplate shall be secured to cabinet with a full-length stainless steel piano-hinge and equipped with a tumbler lock keyed like other Bobrick washroom accessories. Unit shall have a self-closing panel covering disposal opening. Panel shall have bottom edge hemmed for safety, be secured to cabinet with spring-loaded, full-length stainless steel piano-hinge, and equipped with international graphic symbols identifying sanitary disposal. Unit shall be furnished with a removable, leak-proof molded polyethylene receptacle. Receptacle shall have a capacity of 0.8-gal. (3-L).

Surface-Mounted Sanitary Disposal shall be Model B-9254 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.