

Model RBA4110-995



Materials & Features

Shower Rail set consists of a wall mounted stainless steel 900mm shower grab rail complete with satin slider, handset and 1.5m hose. Water supply connection includes backflow prevention. Grab rail is accessible compliant when installed in accordance with AS1428.1.

Technical Detail

Rail:	32mm [dia], type 304 stainless steel satin finish
Hose:	1.5m
Inlet Connection:	DN 15mm [1/2"] BSP
Water Pressure:	Includes backflow prevention
Water Temperature:	100 – 500kPa
Flow Rate:	50°C Maximum
WELS:	6.0LPM
WELS Reg. Number:	5 Star
	S14913

Available Models

RBA4110-995

Shower Straight Rail Kit I Satin

Related Products

RBA4110-994

Shower Straight Rail Kit & Mixer incl. polished slider, handset and 1.5m hose & mixer

RBA4110-993

Shower Straight Rail Kit incl. polished slider, handset and 1.5m hose

RBA4110-939

Shower T-Rail Kit I Satin


Installation

Should be installed with RBA4000-075 to comply with AS1428.1. Warning: Grab rails are no stronger than the anchors or walls to which they are attached and must be firmly secured in order to support the loads for which they are intended.

For best results, unit should be inspected and cleaned regularly as per the instructions in the RBA Product Warranty, Cleaning Care Guide, available on our websites.

Note: For Australia, Installation shall be in accordance with the PCA [Plumbing Code of Australia] and any relevant local authority requirements.

Important: Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

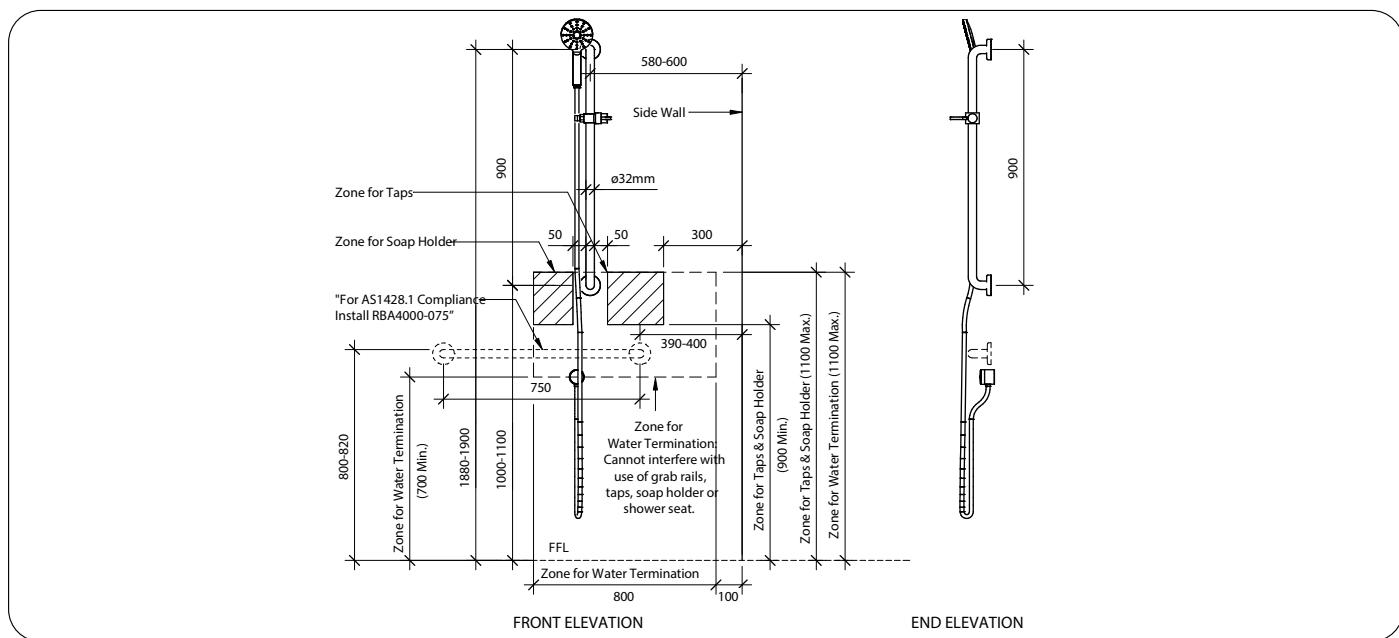

As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 11/25 © 2025 by RBA Group TD/Model RBA4110-995/1125

