

90° Ambulant Grab Rail Bright Polished



Model RBA4098-450

Materials & Features

Stainless Steel 90° angled grab rail meets all requirements of the ambulant section of AS1428.1-2009 (incl Amdt. 2010) when installed correctly. The snap flanges conceal the fixings. Unit is ambidextrous and can be mounted on either Left or Right Hand side.

Technical Detail

32mm [Dia], 304 Bright Polished Stainless Steel Rail.

Fixings: Included SWL: 1100N

Available Models

RBA4098-450 Bright Polished Ambulant Grab Rail 90°, 450 x 450mm

Related Products


RBA4090-999-001 Single Dress Plate for panel mounting

RBA4330-022 Tactile Sign, Male Ambulant, 316 Stainless Steel RBA4330-023 Tactile Sign, Female Ambulant, 316 Stainless Steel

Installation

Warning: Grab Rails are no stronger than the anchors or walls to which they are attached and, therefore, must be firmly secured in order to support the loads for which they are intended.

Important: Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

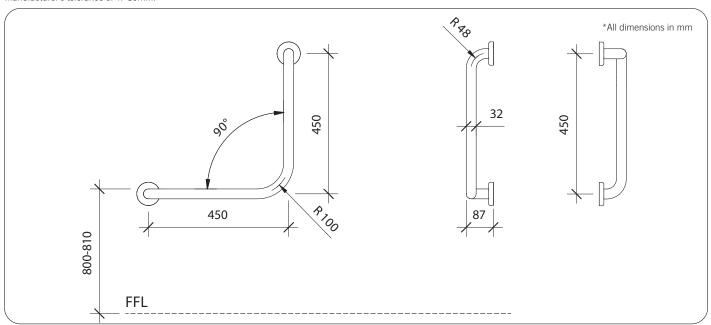





As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 04/21 © 2021 by RBA Group TD/Model RBA4098-450/0421