

Raffaello Straight Rail | Bright

Model RBA4600-009 Series

Materials & Features

Goman stainless steel straight grab rails are available in a range of lengths and meet the requirements of AS1428.1-2009. The snap flange cover conceals the fixings.



Technical Detail

Rail: 32mm [Dia], 304 Satin Stainless Steel

Fixings: Included
Finish: Bright Polished

SWL: 150kg


Available Models

RBA4600-019 Straight Grab Rail 366mm
RBA4600-029 Straight Grab Rail 516mm
RBA4600-039 Straight Grab Rail 666mm
RBA4600-049 Straight Grab Rail 816mm
RBA4600-059 Straight Grab Rail 1116mm

Installation

Warning: Grab rails are no stronger than the anchors or walls to which they are attached and must be firmly secured in order to support the loads for which they are intended. Refer local codes and Installation Instructions for location of fixing points, method of attachment, etc.

Important: Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

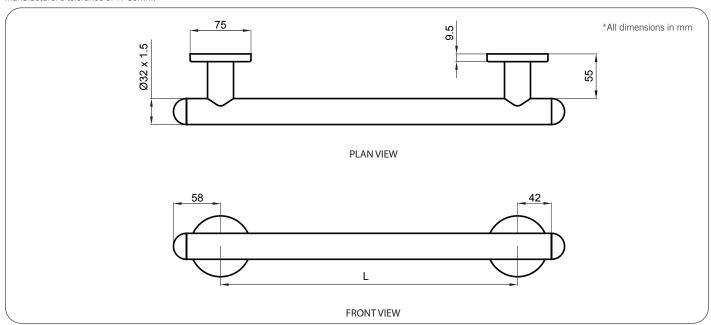







As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 06/21 © 2021 by RBA Group TD/Model RBA4600-009 Series/0621

^{*}Additional sizes available upon request