

# **Outdoor Drinking Fountain**

# Model RBA8910-002



## **Materials & Features**

Manufactured from stainless steel including a stainless shielded bubbler with self-closing push button and non-squirt features. Valve includes flow adjuster and strainer. Integral perforated drain for hygiene & ease of cleaning. Smooth radiused design eliminates sharp corners. Fully concealed pipework and fixings. Unit is non-refrigerated.

#### **Technical Detail**

Inlet Connection: G½B

Outlet Connection: 40mm BSP waste Water Pressure: 200 – 500 kPa

Force to Activate: ≤ 22N

Basin:1.2mm, type 304 Stainless SteelHousing:2.5mm, type 304 Stainless SteelFinish:Enviro-Glaze® green (-002 only)

## **Available Models**

**RBA8910-002** Outdoor Drinking Fountain, Green

**RBA8910-001** Outdoor Drinking Fountain, Stainless Steel

Single, double, triple and pet fountain units also available. Contact RBA for more details.


#### **Related Products**

**RBA8910-402** Outdoor Pet Fountain (can be used in conjunction with RBA8910-002 as a complete solution)

**RBA8910-202** Hi-Lo™ Outdoor Drinking Fountain, Enviro-Glaze® green

**RBA8909-429** Outdoor Drinking Fountain, Accessible

**Important:** Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

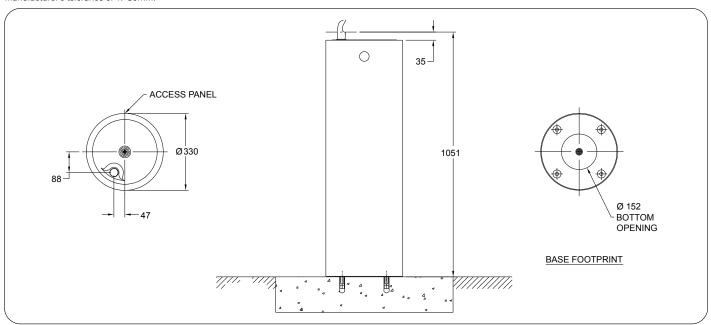







As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 01/15 © 2015 by RBA Group TD/Model RBA8910-002/0115