Model RBA4600-009 Series

Materials & Features
Goman stainless steel straight grab rails are available in a range of lengths and meet the requirements of AS1428.1-2009. The snap flange cover conceals the fixings.
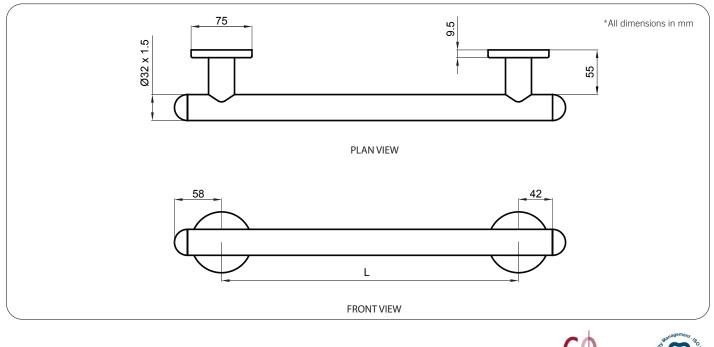
Technical Detail
|	
Rail:	32mm [Dia], 304 Satin Stainless Steel
Fixings:	Included
Finish:	Chrome Plated
SWL:	150kg

Available Models
RBA4600-019	Straight Grab Rail 366mm
RBA4600-029	Straight Grab Rail 516mm
RBA4600-039	Straight Grab Rail 666mm
RBA4600-049	Straight Grab Rail 816mm
RBA4600-059	Straight Grab Rail 1116mm
RBA4600-069	Straight Grab Rail 1029mm

*Additional sizes available upon request

Installation
Warning: Grab rails are no stronger than the anchors or walls to which they are attached and must be firmly secured in order to support the loads for which they are intended. Refer local codes and Installation Instructions for location of fixing points, method of attachment, etc.

Important: Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

*All dimensions in mm

PLAN VIEW

FRONT VIEW

1 of 1

SYDNEY | MELBOURNE | BRISBANE | PERTH | AUCKLAND
Australia 1300 788 778 www.rba.com.au | **New Zealand** 0800 722 111 www.rbagroup.co.nz