


90° Ambulant Grab Rail, Matte Black



Model RBA4095-450

Materials & Features

Stainless Steel 90° angled grab rail meets all requirements of the ambulant section of AS1428.1-2009 (amdt 1, 2010) when installed correctly. The snap flange cover conceals the fixings. Unit is ambidextrous and can be mounted on either Left or Right Hand side.

Technical Detail


Rail: Finish SWL Fixings: 32mm [Dia], 304 Stainless Steel Matte Black 2000N Included

Available Models RBA4095-450

Ambulant Grab Rail 90° 450 x 450mm, Matte Black

Installation

Warning: Grab Rails are no stronger than the anchors or walls to which they are attached and, therefore, must be firmly secured in order to support the loads for which they are intended.

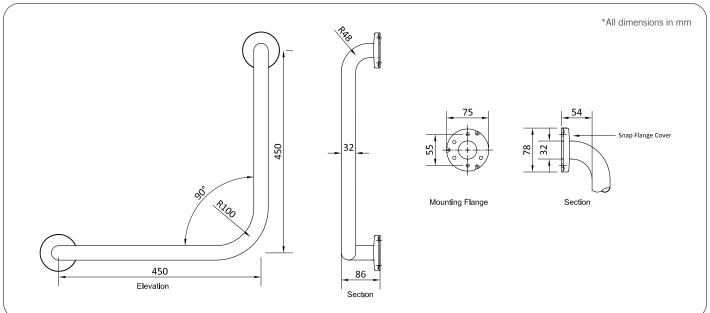

Important: Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.



As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 10/21 © 2021 by RBA Group TD/Model RBA4095-450/1021