

Models RBA4118-993 & RBA4118-994



Materials & Features

Shower Rail set consists of a wall mounted stainless steel 900mm shower grab rail complete with slider, handset, hose and mixer [RBA4118-994] only. Water supply connection includes backflow prevention. Grab rail is accessible compliant when installed in accordance with AS1428.1.

Technical Detail

Rail:	#304 Stainless Steel, Bright, 32mm Dia
Hose:	1.5m
Inlet Connection:	DN 15mm [1/2"] BSP Includes backflow prevention
Water Pressure:	150-500 kpa
Water Temperature:	50°C Maximum
Flow Rate:	6.0 LPM
WELS:	5 Star
WELS Reg. Number:	S14913

Available Model

- RBA4118-993** 5 Star Shower Rail Set | Bright Polished
- RBA4118-994** 5 Star Shower Rail Set & Mixer | Bright Polished

Related Products

- RBA1110-750** oken Shower Mixer | Chrome | Rectangular Plate
- RBA4118-950** 5 Star Shower T-Rail Kit | Right Hand | Bright Polished
- RBA4118-951** 5 Star Shower T-Rail Kit | Left Hand | Bright Polished


Installation

Should be installed with RBA4008-075 to comply with AS1428.1. Warning: Grab rails are no stronger than the anchors or walls to which they are attached and must be firmly secured in order to support the loads for which they are intended.

Note: For Australia, Installation shall be in accordance with the PCA [Plumbing Code of Australia] and any relevant local authority requirements.

For best results, unit should be inspected and cleaned regularly as per the instructions in the RBA Product Warranty, Cleaning Care Guide, available on our websites.

Important: Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

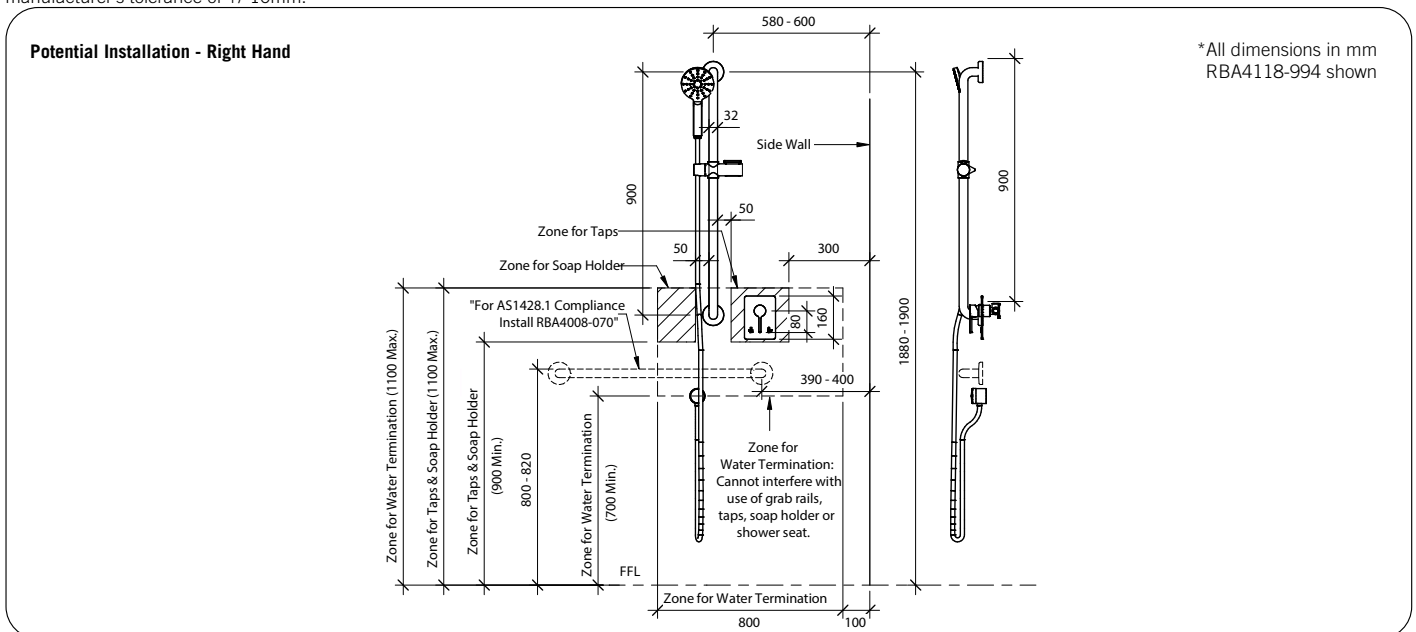

As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 10/23 © 2023 by RBA Group TD/Model RBA4118-993, RBA4118-994/1023